



ROCKMORE ROK 3 DTH HAMMER




Hole Diameters 92mm - 105mm

SPECIFICATIONS

Thread Connection	Shipping Weight		Outside Diameter		Length Without Bit		Bit Size Range	
	kg	lbs	mm	in	mm	in	mm	in
2-3/8" API Reg Box	22.0	48.5	81.0	3.19	750	29.53	92 - 105	3-5/8 - 4-1/8

AIR CONSUMPTION

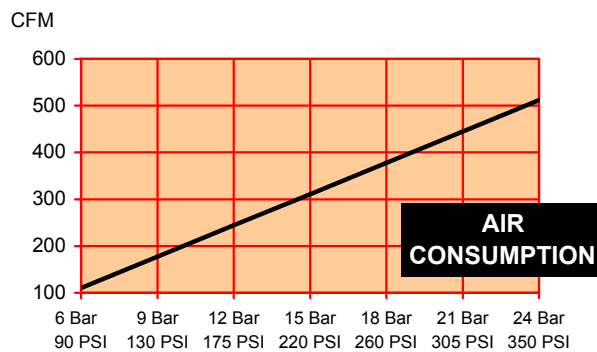


PERFORMANCE

The ROK 3 is designed for drilling at air pressures between 6 - 24 BAR (90 - 350psi) and provides high performance with a low air consumption.

6 Bar 90 PSI	9 Bar 130 PSI	12 Bar 175 PSI	15 Bar 220 PSI	18 Bar 260 PSI	21 Bar 305 PSI	24 Bar 350 PSI
3.1 m ³ /min 110 SCFM	5.0 m ³ /min 177 SCFM	6.9 m ³ /min 244 SCFM	8.8 m ³ /min 311 SCFM	10.7 m ³ /min 378 SCFM	12.6 m ³ /min 445 SCFM	14.5 m ³ /min 512 SCFM

IMPACT RATE

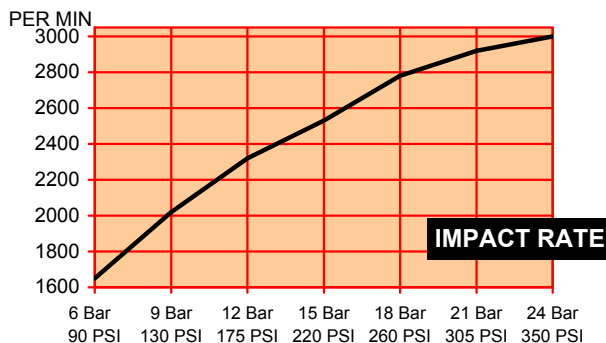

DTH BITS

The ROK 3 DTH hammer requires exclusively designed DTH bits with the ROK 3 shank design--available only from Rockmore. DTH bits are available in head diameter 92mm - 105mm in several face configurations with hemispherical or ballistic carbides.

ROCKMORE
Gussstahlwerkstrasse 21
A-8750 Judenburg - Austria
☎ ++43 35 72 / 86 300-0
FAX ++43 35 72 / 84 1 79
austria@rockmore-intl.com

ROCKMORE
10065 S.W. Commerce Circle
Wilsonville, OR 97070, USA
☎ 503-682-1001
FAX 503-682-1002
info@rockmore-intl.com

www.rockmore-intl.com