




ROCKMORE ROK 4 DTH HAMMER



Hole Diameters 4-5/16" (110mm) - 5-1/2" (140mm)



SPECIFICATIONS

Thread Connection	Shipping Weight		Outside Diameter		Length Without Bit		Bit Size Range	
	kg	lbs	mm	in	mm	in	mm	in
2-3/8" API Reg Pin	38.0	84.0	97.0	3-13/16	1031	40-19/32	110 - 140	4-5/16 - 5-1/2

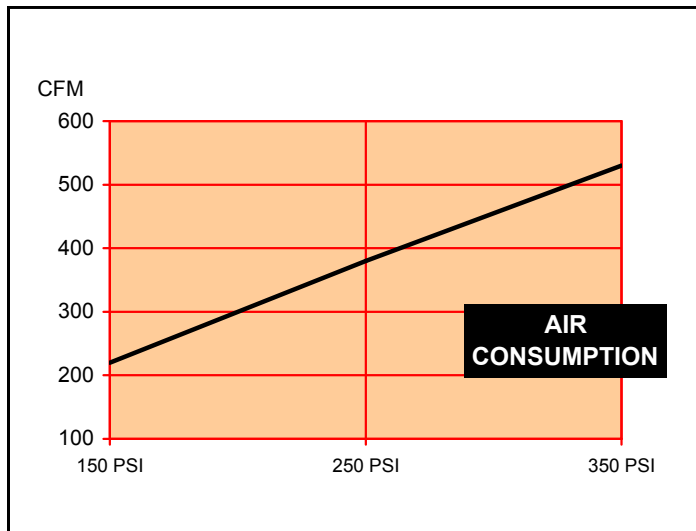

PERFORMANCE

The ROK 4 is designed for drilling at air pressures between 10 - 24 BAR (150 - 350psi) and provides high performance with a low air consumption.

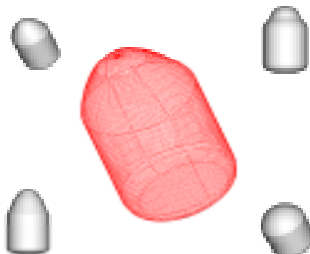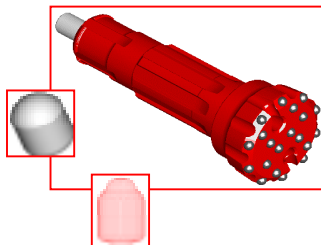

DTH BITS

The ROK 4 DTH hammer requires a Rok 4 bit shank configuration equivalent to DHD340A or COP44. DTH bits are available in head diameter 4-5/16" (110mm) - 5-1/2" (140mm) in several face configurations with hemispherical or ballistic carbides.

ROCKMORE
Gusstahlwerkstrasse 21
A-8750 Judenburg - Austria
☎ ++43 35 72 / 86 300-0
FAX ++43 35 72 / 84 1 79
austria@rockmore-intl.com

ROCKMORE
10065 S.W. Commerce Circle
Wilsonville, OR 97070, USA
☎ 503-682-1001
FAX 503-682-1002
info@rockmore-intl.com

www.rockmore-intl.com