




**ROCKMORE**  
INTERNATIONAL  
Rock Drilling Tools



<b>DTH HAMMER</b>	<b>ROK 300-001</b>	2-3/8" API Reg Pin
		<b>Recommended Bit Diameter</b> 88 - 105mm [3.5" - 4.1"]



**Features:**

- High Performance Design
- Integrated SonicFlow Technology
- Patented Innovations
- Superior Penetration Rates
- Reduced Number of Components
- Easy Assembly / Maintenance
- Advanced Materials / Heat-Treatment
- Extended Service Life


**SonicFlow Technology** greatly improves the air flow characteristics within the ROK hammer and ensures that the high pressure air paths are optimized to deliver greater energy to the piston. This is achieved by incorporating scientific air flow concepts in the design of the hammer and its various components such as the Top Sub, Piston, and Wear Sleeve. This technology results in more impact energy to the bit and produces higher penetration rates and better overall hammer performance.



**Applications:**

- Mining / Blast Hole
- Environmental
- Geothermal
- Construction / Quarry
- Exploration

**Innovative Design Features**

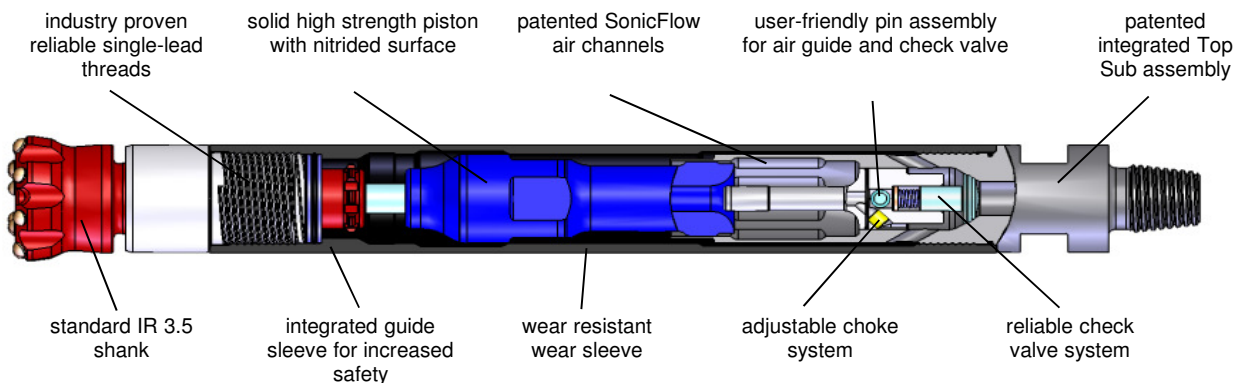

ROCKMORE International, Inc. 10065 S.W. Commerce Circle; Wilsonville, OR 97070, USA  
Tel: +1-503-682-1001; Fax: +1-503-682-1002; info@rockmore-intl.com

ROCKMORE International GmbH Collini - Strasse 2; A-8750 Judenburg - Austria  
Tel: +43 3572 86 300-0; Fax: +43 3572 84 179; austria@rockmore-intl.at

www.rockmore-intl.com

Rev. 3-16-16




**ROCKMORE**  
INTERNATIONAL  
*Rock Drilling Tools*



**Integrated SonicFlow  
Technology**

# ROK 300-001

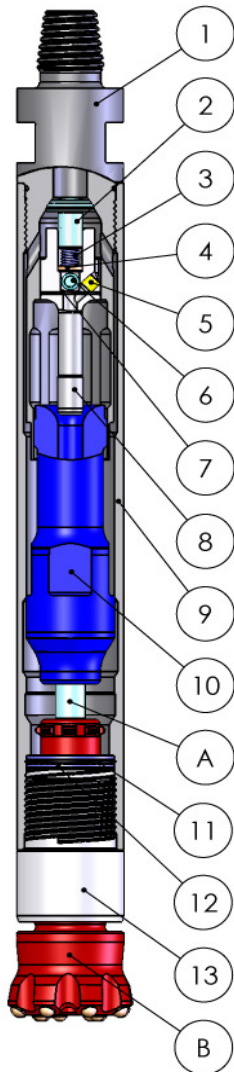

Patented

## Parts List

Item	Part Number	Description
	ROK 300-001	DTH Hammer, 300, IR 3.5, 2-3/8" API Reg Pin
1	300TS-001	Top Sub, 2-3/8" API Reg Pin
2	CV-004	Check Valve
3	SP-001	Spring
4	SR-002	Spring Rest
5	CH-005	Choke, Nylon
6	PN-006	Pin, 0.625" Dia, 2.40" L
7	R2-127	O-Ring, 1.424" X 0.103"
8	AG-004	Air Guide
9	300WS-001	Wear Sleeve
10	PT-009	Piston
A	BTIR35HD-1018	IR 3.5HD Blow Tube
11	R2-135	O-Ring, 1.925" X 0.103"
12	BR-007	Bit Retainer Ring
13	300DS-001	Driver Sub
B	DTH Bit	IR 3.5 Shank

## Operating Parameters

Air Pressure	Air Consumption
10.4 Bar [150 PSI]	4.1 m <sup>3</sup> /min [145 SCFM]
17.2 Bar [250 PSI]	5.6 m <sup>3</sup> /min [199 SCFM]
24.1 Bar [350 PSI]	9.0 m <sup>3</sup> /min [318 SCFM]
Oil consumption at 24.1 Bar (350 PSI):	0.3 l/hr [0.08 gallon/hr]
Recommended rotation speed:	35 r/min to 95 r/min
Minimum diameter difference between wear sleeve and bit:	10 mm [0.39"]

## Technical Specifications

Standard Top Sub	2-3/8" API Reg Pin
Bit shank type	IR 3.5
Recommended bit diameter, mm [in]	88 to 105 [3.5 to 4.1]
Outside diameter, mm [in]	78 [3.1]
Wear sleeve discard diameter, mm [in]	71 [2.8]
Wrench flat size on Top Sub, mm [in]	64 [2.5]
Length without drill bit, mm [in]	818 [32.2]
Weight without drill bit, kg [lbs]	20.9 [46.0]

ROCKMORE  
International, Inc.  
10065 S.W. Commerce Circle  
Wilsonville, OR 97070, USA  
Tel: +1-503-682-1001  
Fax: +1-503-682-1002  
info@rockmore-intl.com

ROCKMORE  
International GmbH  
Collini - Strasse 2  
A-8750 Judenburg - Austria  
Tel: +43 3572 86 300-0  
Fax: +43 3572 84 179  
austria@rockmore-intl.at